





タワークレーン 42 K.1/J



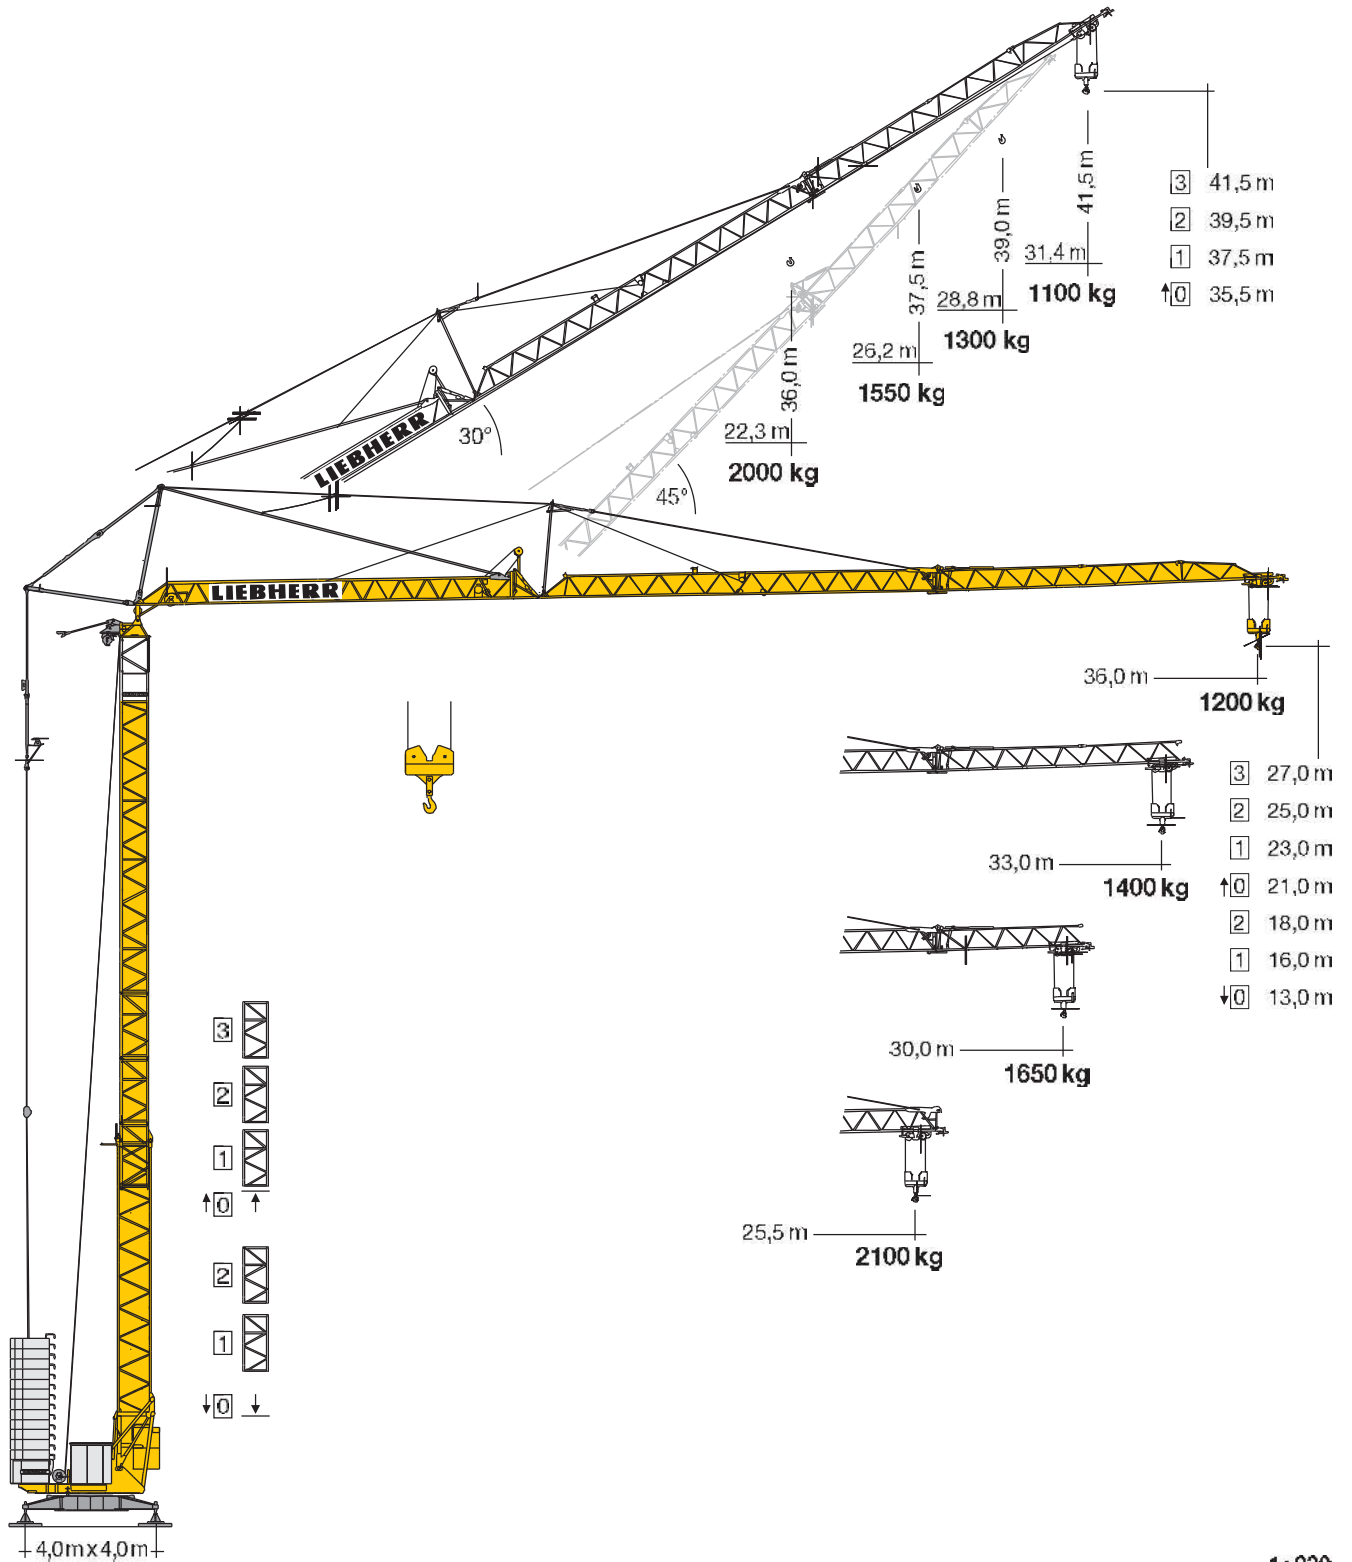

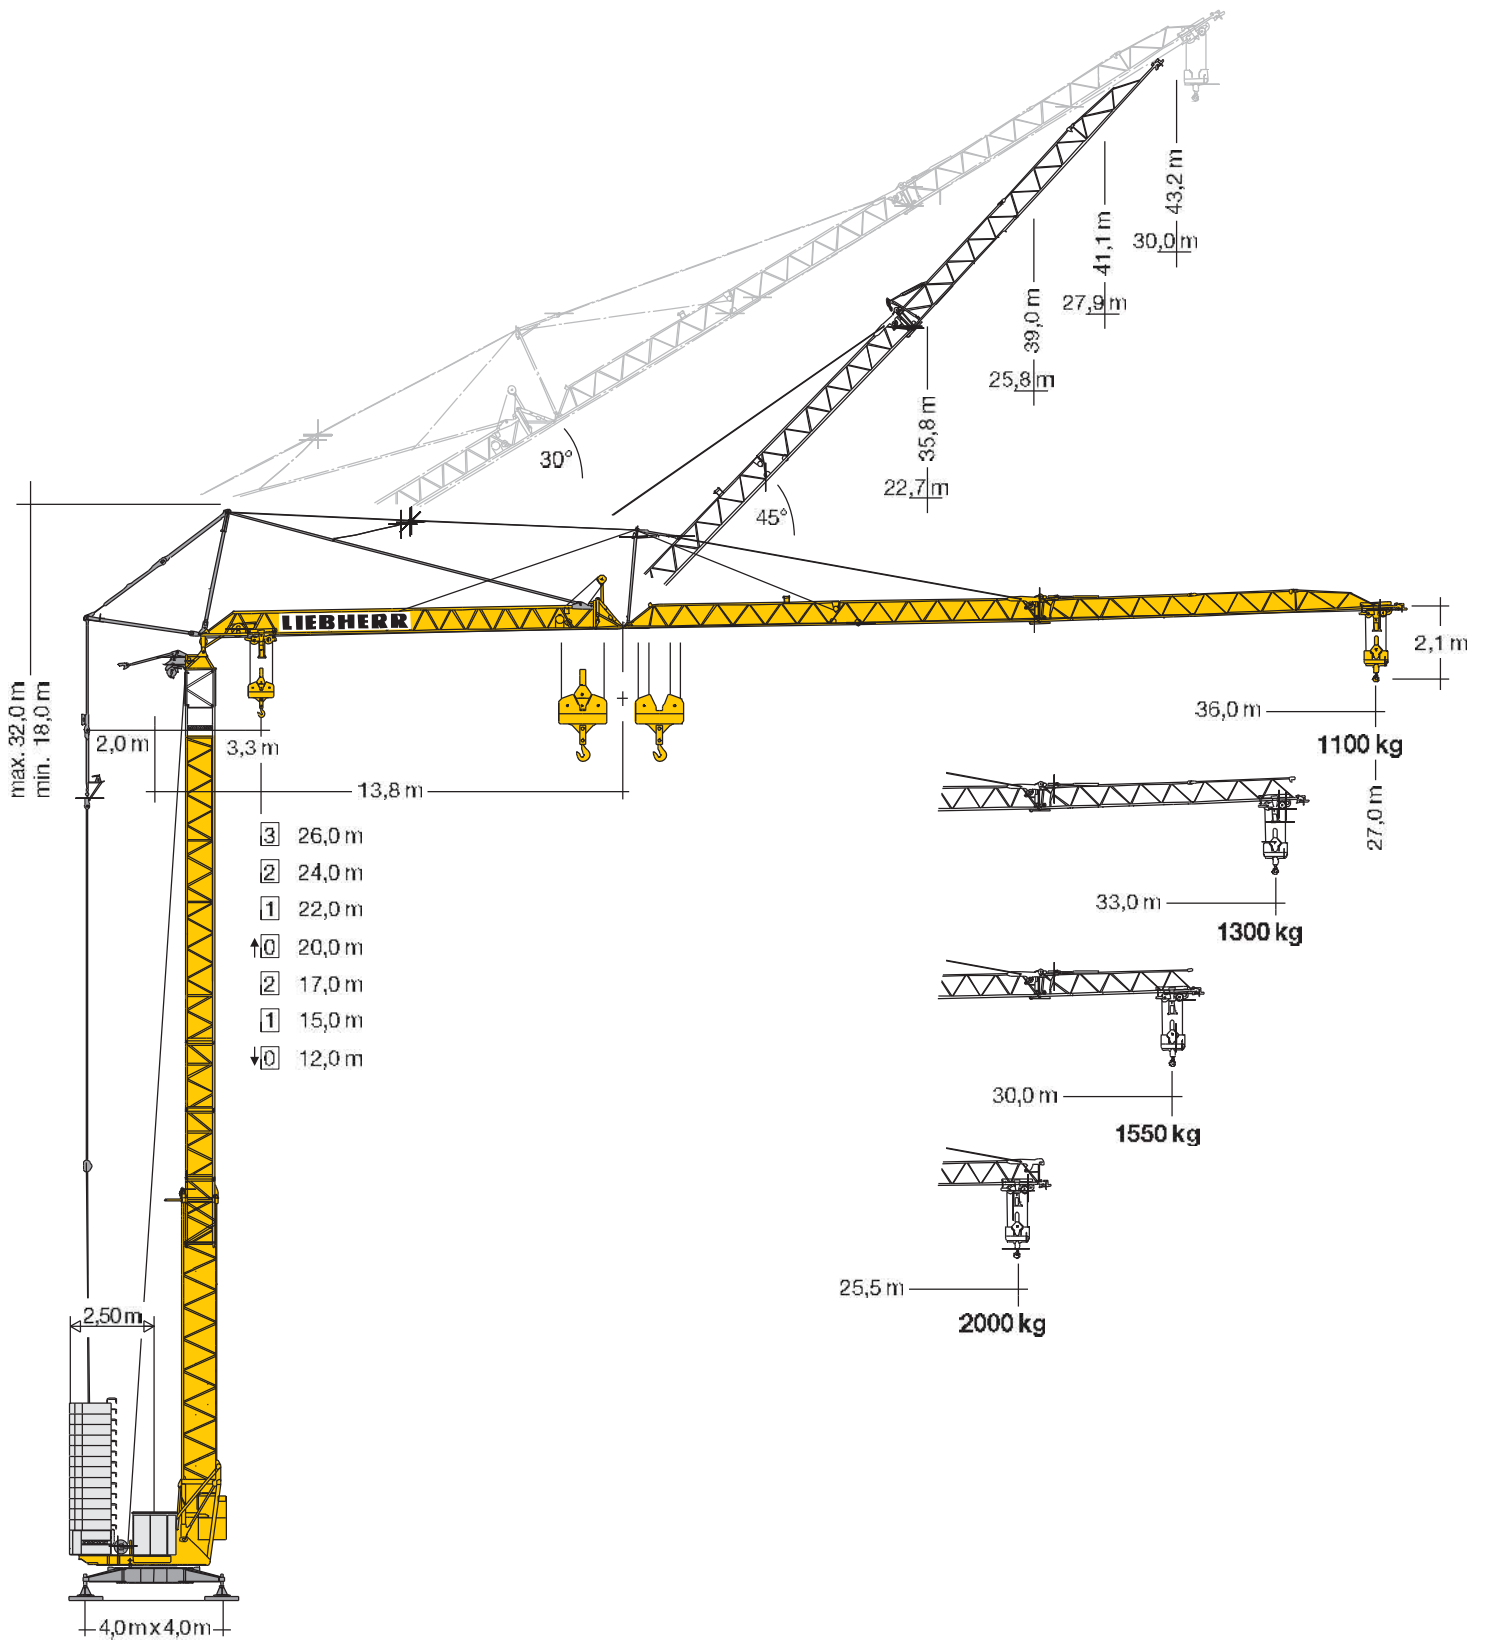














重量






	$r = 2,50 \text{ m}$	1 x 3320 kg	12 x 1750 kg	1 x 725 kg	25045 kg		max. 11800 kg (HH 26 m: + 900 kg)
--	----------------------	-------------	--------------	------------	----------	---	--------------------------------------

作業半径と定格荷重




m	m/kg		m/kg																			
			16,0	18,0	20,0	21,0	22,0	23,0	24,0	25,0	25,5	26,0	27,0	28,0	29,0	30,0	31,0	32,0	33,0	34,0	35,0	36,0
36,0	3,3 - 20,83 2300		2300	2300	2300	2280	2160	2050	1950	1860	1810	1770	1690	1620	1560	1490	1440	1380	1330	1290	1240	1200
33,0	3,3 - 21,67 2300		2300	2300	2300	2300	2260	2150	2040	1950	1900	1860	1780	1700	1630	1570	1510	1450	1400			
30,0	3,3 - 22,60 2300		2300	2300	2300	2300	2300	2250	2140	2040	2000	1950	1870	1790	1720	1650						
25,5	3,3 - 23,58 2300		2300	2300	2300	2300	2300	2300	2250	2150	2100											

m	m/kg		m/kg																				
			13,0	14,0	16,0	18,0	20,0	23,0	24,0	25,0	25,5	26,0	27,0	28,0	29,0	30,0	31,0	32,0	33,0	34,0	35,0	36,0	
36,0	3,3 - 29,92 1400		1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1395	1338	1284	1234	1186	1142	1100
33,0	3,3 - 31,15 1400		1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1353	1300			
30,0	3,3 - 30,00 1400		1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400				
25,5	3,3 - 25,50 1400		1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400				

m	m/kg		m/kg																			
			16,0	17,0	18,0	19,0	20,0	23,0	24,0	25,0	25,5	26,0	27,0	28,0	29,0	30,0	31,0	32,0	33,0	34,0	35,0	36,0
36,0	3,3 - 17,11 2800		2800	2800	2633	2465	2315	1949	1849	1757	1714	1673	1595	1524	1457	1395	1338	1284	1234	1186	1142	1100
33,0	3,3 - 17,79 2800		2800	2800	2760	2584	2428	2046	1942	1846	1801	1758	1677	1603	1533	1469	1409	1353	1300			
30,0	3,3 - 18,53 2800		2800	2800	2800	2717	2553	2154	2045	1945	1898	1853	1768	1690	1617	1550						
25,5	3,3 - 19,32 2800		2800	2800	2800	2800	2686	2268	2154	2049	2000											




m	m/kg		Auslegersteilstellung 30° / Elevated jib 30° / Flèche inclinée 30° Braccio inclinato a 30° / Pluma inclinada 30° / Lança inclinada 30°															
			16,0	18,0	20,0	22,3	23,0	24,0	25,0	26,0	26,2	27,0	28,0	28,8	29,0	30,0	31,0	31,4
36,0	3,0 - 17,05 2300		2300	2160	1900	1670	1610	1530	1450	1390	1370	1320	1270	1220	1210	1160	1120	1100
33,0	3,0 - 17,88 2300		2300	2280	2010	1770	1700	1620	1540	1470	1460	1400	1340	1300				
30,0	3,0 - 18,79 2300		2300	2300	2140	1880	1810	1720	1640	1560	1550							
25,5	3,0 - 19,79 2300		2300	2300	2270	2000												

駆動装置

	U/min. 0 ↔ 0,9 sl./min tr/min	3,0 kW EDC
	20,0 / 40,0 m/min (400V / 50 Hz) 2,0 / 4,0 m/min (440V / 60 Hz)	1,3 / 2,3 kW
	0 - 45°, ca. 60 sec. (400V / 50 Hz) 0 - 45°, ca. 48 sec. (440V / 60 Hz)	1,5 kW

	400 V	Hz	kVA
77,0 m	4 x 6 mm ² FU	50	17,0 FU

	440 V	Hz	kVA
77,0 m	4 x 6 mm ² FU	60	17,0 FU

	巻上速度		
	ステップ	kg	m/min
	1	2300	4,0
	2	2300	20,0
	3	1300	38,0
	4	1000	50,0
	1	1400 2800	4,0 2,0
	2	1400 2800	20,0 10,0
	3	1300 2600	38,0 19,0
	4	1000 2000	50,0 25,0